

Rail-to-rail CMOS quad operational amplifier

Datasheet –production data

Features

- Rail-to-rail input and output voltage ranges
- Single (or dual) supply operation from 2.7 to 16 V
- Extremely low input bias current: 1 pA typical
- Low input offset voltage: 5 mV max. (A grade)
- Specified for 600 Ω and 100 Ω loads
- Low supply current: 200 μ A/ampli. ($V_{CC} = 3$ V)
- Latch-up immunity
- Spice macromodel included in this specification

Related products

- See TS56x series for better accuracy and smaller packages

Description


The TS914 device is a rail-to-rail CMOS quad operational amplifier designed to operate with a single or dual supply voltage.

The input voltage range V_{icm} includes the two supply rails V_{CC+} and V_{CC-} .

The output reaches $V_{CC-} + 50$ mV, $V_{CC+} - 50$ mV, with $R_L = 10$ k Ω and $V_{CC-} + 350$ mV, $V_{CC+} - 350$ mV, with $R_L = 600$ Ω

This product offers a broad supply voltage operating range from 2.7 to 16 V and a supply current of only 200 μ A/amp. ($V_{CC} = 3$ V).

The source and sink output current capability is typically 40 mA (at $V_{CC} = 3$ V), fixed by an internal limitation circuit.

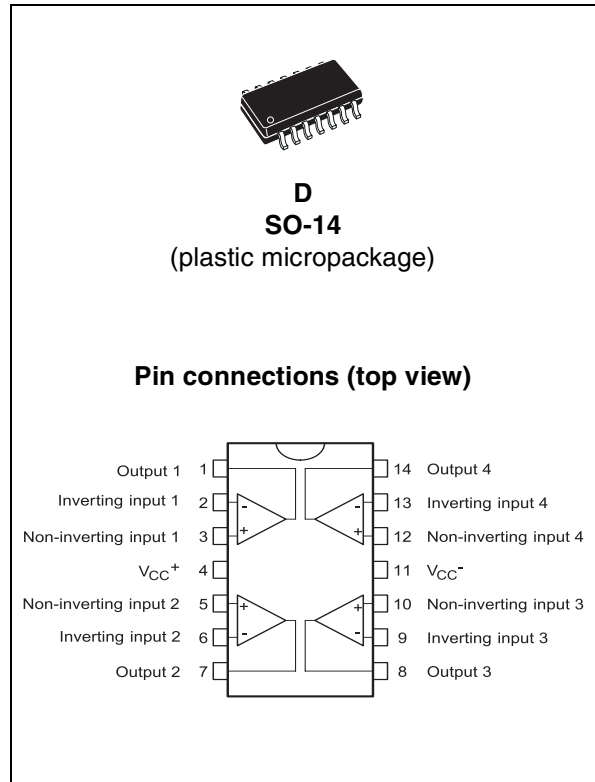

1 Absolute maximum ratings and operating conditions

Table 1. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|------------|---|-------------|------|
| V_{CC} | Supply voltage ⁽¹⁾ | 18 | V |
| V_{id} | Differential input voltage ⁽²⁾ | ± 18 | V |
| V_{in} | Input voltage ⁽³⁾ | -0.3 to 18 | V |
| I_{in} | Current on inputs | ± 50 | mA |
| I_o | Current on outputs | ± 130 | mA |
| T_j | Maximum junction temperature | 150 | °C |
| T_{stg} | Storage temperature | -65 to +150 | °C |
| R_{thja} | Thermal resistance junction to ambient ⁽⁴⁾ | 103 | °C/W |
| R_{thjc} | Thermal resistance junction to case | 31 | °C/W |
| ESD | HBM: human body model ⁽⁵⁾ | 1 | kV |
| | MM: machine model ⁽⁶⁾ | 50 | V |
| | CDM: charged device model ⁽⁷⁾ | 1.5 | kV |

1. All voltage values, except differential voltage are with respect to network ground terminal.
2. Differential voltages are the non-inverting input terminal with respect to the inverting input terminal.
3. The magnitude of input and output voltages must never exceed $V_{CC} + 0.3$ V.
4. Short-circuits can cause excessive heating. Destructive dissipation can result from simultaneous short-circuit on all amplifiers. These are typical values.
5. Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 kΩ resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.
6. Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5 Ω). This is done for all couples of connected pin combinations while the other pins are floating.
7. Charged device model: all pins and the package are charged together to the specified voltage and then discharged directly to ground through only one pin. This is done for all pins.


Table 2. Operating conditions

| Symbol | Parameter | Value | Unit |
|------------|--------------------------------------|------------------------------------|------|
| V_{CC} | Supply voltage | 2.7 to 16 | V |
| V_{icm} | Common mode input voltage range | $V_{CC-} - 0.2$ to $V_{CC+} + 0.2$ | V |
| T_{oper} | Operating free air temperature range | -40 to + 125 | °C |



2 Schematic diagram

Figure 1. Schematic diagram

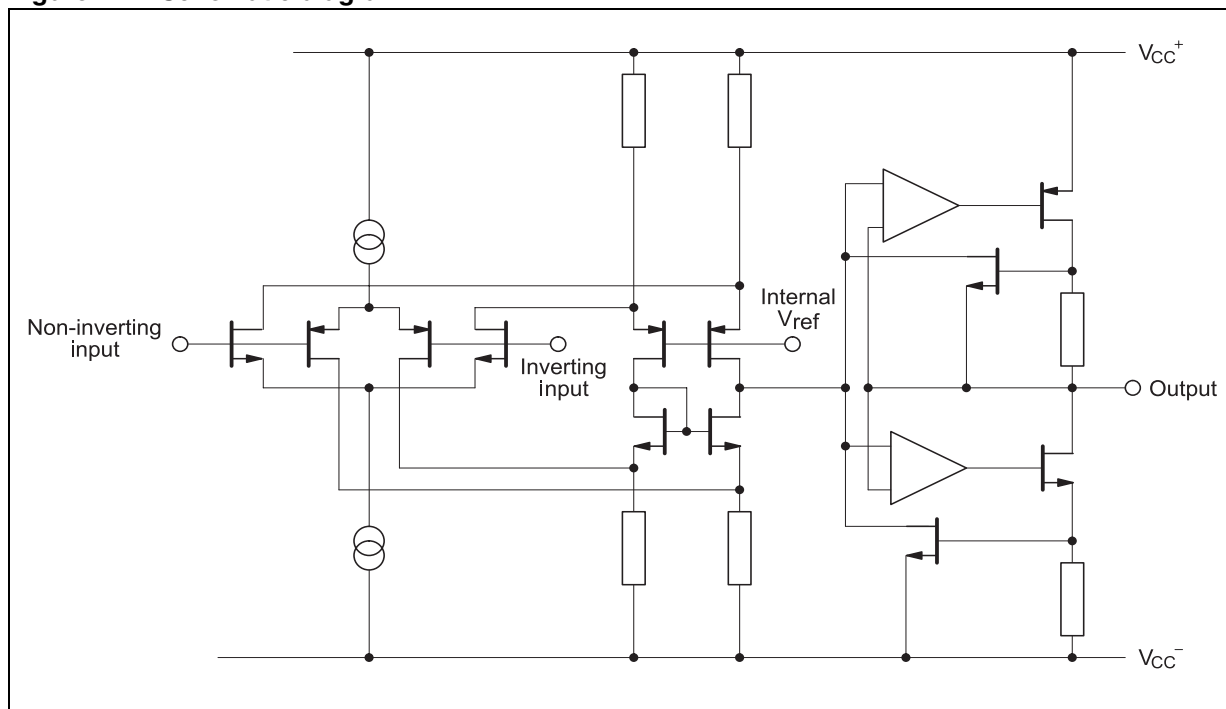

3 Electrical characteristics

Table 3. $V_{CC+} = 3\text{ V}$, $V_{CC-} = 0\text{ V}$, R_L, C_L connected to $V_{CC}/2$, $T_{amb} = 25\text{ °C}$ (unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------|--|---|------------|------------------|--------------------|-------------------------|
| V_{io} | Input offset voltage ($V_{icm} = V_o = V_{CC}/2$) | TS914 TS914A $T_{min} \leq T_{amb} \leq T_{max}$, TS914 $T_{min} \leq T_{amb} \leq T_{max}$, TS914A | | | 10 5 12 7 | mV |
| ΔV_{io} | Input offset voltage drift | | | 5 | | $\mu\text{V}/\text{°C}$ |
| I_{io} | Input offset current ⁽¹⁾ | $T_{min} \leq T_{amb} \leq T_{max}$ | | 1 | 100 200 | pA |
| I_{ib} | Input bias current ⁽¹⁾ | $T_{min.} \leq T_{amb} \leq T_{max}$ | | 1 | 150 300 | pA |
| I_{CC} | Supply current | per amplifier, $A_{VCL} = 1$, no load $T_{min} \leq T_{amb} \leq T_{max}$ | | 200 | 300 400 | μA |
| CMR | Common mode rejection ratio | $V_{icm} = 0$ to 3 V , $V_o = 1.5\text{ V}$ | | 70 | | dB |
| SVR | Supply voltage rejection ratio | $V_{CC+} = 2.7$ to 3.3 V , $V_o = V_{CC}/2$ | | 80 | | dB |
| A_{vd} | Large signal voltage gain | $R_L = 10\text{ k}\Omega$, $V_o = 1.2\text{ V}$ to 1.8 V $T_{min} \leq T_{amb} \leq T_{max}$ | 3 2 | 10 | | V/mV |
| V_{OH} | High level output voltage | $V_{id} = 1\text{ V}$, $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ $R_L = 100\ \Omega$ $V_{id} = 1\text{ V}$, $T_{min} \leq T_{amb} \leq T_{max}$ $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ | 2.9 2.2 | 2.97 2.7 2 | | V |
| V_{OL} | Low level output voltage | $V_{id} = -1\text{ V}$, $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ $R_L = 100\ \Omega$ $V_{id} = -1\text{ V}$, $T_{min} \leq T_{amb} \leq T_{max}$ $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ | | 50 300 900 | 100 600 | mV |
| I_o | Output short-circuit current | $V_{id} = \pm 1\text{ V}$ Source ($V_o = V_{CC-}$) Sink ($V_o = V_{CC+}$) | | 40 40 | | mA |
| GBP | Gain bandwidth product | $A_{VCL} = 100$, $R_L = 10\text{ k}\Omega$ $C_L = 100\text{ pF}$, $f = 100\text{ kHz}$ | | 0.8 | | MHz |
| SR | Slew rate | $A_{VCL} = 1$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$, $V_{in} = 1.3\text{ V}$ to 1.7 V | | 0.5 | | V/ μs |
| ϕ_m | Phase margin | | | 30 | | ° |
| e_n | Equivalent input noise voltage | $R_s = 100\ \Omega$, $f = 1\text{ kHz}$ | | 30 | | nV/ $\sqrt{\text{Hz}}$ |
| V_{O1}/V_{O2} | Channel separation | $f = 1\text{ kHz}$ | | 120 | | dB |

1. Maximum values include unavoidable inaccuracies of the industrial tests.

Table 4. $V_{CC+} = 5\text{ V}$, $V_{CC-} = 0\text{ V}$, R_L, C_L connected to $V_{CC}/2$, $T_{amb} = 25\text{ °C}$ (unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------|--|---|--------------------------------|---------------------|------------------------------|-------------------------|
| V_{io} | Input offset voltage ($V_{icm} = V_o = V_{CC}/2$) | TS914 TS914A $T_{min} \leq T_{amb} \leq T_{max}$, TS914 $T_{min} \leq T_{amb} \leq T_{max}$, TS914A | | | 10 5 12 7 | mV |
| ΔV_{io} | Input offset voltage drift | | | 5 | | $\mu\text{V}/\text{°C}$ |
| I_{io} | Input offset current ⁽¹⁾ | $T_{min} \leq T_{amb} \leq T_{max}$ | | 1 | 100 200 | pA |
| I_{ib} | Input bias current ⁽¹⁾ | $T_{min} \leq T_{amb} \leq T_{max}$ | | 1 | 150 300 | pA |
| I_{CC} | Supply current | per amplifier, $A_{VCL} = 1$, no load $T_{min} \leq T_{amb} \leq T_{max}$ | | 230 | 350 450 | μA |
| CMR | Common mode rejection ratio | $V_{icm} = 1.5$ to 3 V , $V_o = 2.5\text{ V}$ | | 85 | | dB |
| SVR | Supply voltage rejection ratio | $V_{CC+} = 3$ to 5 V , $V_o = V_{CC}/2$ | | 80 | | dB |
| A_{vd} | Large signal voltage gain | $R_L = 10\text{ k}\Omega$, $V_o = 1.5\text{ V}$ to 3.5 V $T_{min} \leq T_{amb} \leq T_{max}$ | 10 7 | 40 | | V/mV |
| V_{OH} | High level output voltage | $V_{id} = 1\text{ V}$, $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ $R_L = 100\ \Omega$ $V_{id} = 1\text{ V}$, $T_{min} \leq T_{amb} \leq T_{max}$ $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ | 4.85 4.20 4.8 4.1 | 4.95 4.65 3.7 | | V |
| V_{OL} | Low level output voltage | $V_{id} = -1\text{ V}$, $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ $R_L = 100\ \Omega$ $V_{id} = -1\text{ V}$, $T_{min} \leq T_{amb} \leq T_{max}$ $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ | | 50 350 1400 | 100 680 150 900 | mV |
| I_o | Output short-circuit current | $V_{id} = \pm 1\text{ V}$ Source ($V_o = V_{CC-}$) Sink ($V_o = V_{CC+}$) | | 60 60 | | mA |
| GBP | Gain bandwidth product | $A_{VCL} = 100$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$, $f = 100\text{ kHz}$ | | 1 | | MHz |
| SR | Slew rate | $A_{VCL} = 1$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$, $V_{in} = 1\text{ V}$ to 4 V | | 0.8 | | V/ μs |
| ϕ_m | Phase margin | | | 30 | | ° |
| e_n | Equivalent input noise voltage | $R_s = 100\ \Omega$, $f = 1\text{ kHz}$ | | 30 | | nV/ $\sqrt{\text{Hz}}$ |
| V_{O1}/V_{O2} | Channel separation | $f = 1\text{ kHz}$ | | 120 | | dB |

1. Maximum values include unavoidable inaccuracies of the industrial tests.

Table 5. $V_{CC^+} = 10\text{ V}$, $V_{DD} = 0\text{ V}$, R_L , C_L connected to $V_{CC}/2$, $T_{amb} = 25\text{ }^\circ\text{C}$
(unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------|---|---|-----------------------|---------------------|--------------------|------------------------------|
| V_{io} | Input offset voltage ($V_{icm} = V_o = V_{CC}/2$) | TS914 TS914A $T_{min} \leq T_{amb} \leq T_{max}$, TS914 $T_{min} \leq T_{amb} \leq T_{max}$, TS914A | | | 10 5 12 7 | mV |
| ΔV_{io} | Input offset voltage drift | | | 5 | | $\mu\text{V}/^\circ\text{C}$ |
| I_{io} | Input offset current ⁽¹⁾ | $T_{min} \leq T_{amb} \leq T_{max}$ | | 1 | 100 200 | pA |
| I_{ib} | Input bias current ⁽¹⁾ | $T_{min} \leq T_{amb} \leq T_{max}$ | | 1 | 150 300 | pA |
| CMR | Common mode rejection ratio | $V_{icm} = 3\text{ to }7\text{ V}$, $V_o = 5\text{ V}$ $V_{icm} = 0\text{ to }10\text{ V}$, $V_o = 5\text{ V}$ | | 90 75 | | dB |
| SVR | Supply voltage rejection ratio | $V_{CC^+} = 5\text{ to }10\text{ V}$, $V_o = V_{CC}/2$ | | 90 | | dB |
| A_{vd} | Large signal voltage gain | $R_L = 10\text{ k}\Omega$, $V_o = 2.5\text{ V to }7.5\text{ V}$ $T_{min} \leq T_{amb} \leq T_{max}$ | 15 10 | 60 | | V/mV |
| V_{OH} | High level output voltage | $V_{id} = 1\text{ V}$, $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ $R_L = 100\ \Omega$ $V_{id} = 1\text{ V}$, $T_{min} \leq T_{amb} \leq T_{max}$ $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ | 9.85 9 9.8 9 | 9.95 9.35 7.8 | | V |
| V_{OL} | Low level output voltage | $V_{id} = -1\text{ V}$, $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ $R_L = 100\ \Omega$ $V_{id} = -1\text{ V}$, $T_{min} \leq T_{amb} \leq T_{max}$ $R_L = 10\text{ k}\Omega$ $R_L = 600\ \Omega$ | | 50 650 2300 | 180 800 | mV |
| I_o | Output short-circuit current | $V_{id} = \pm 1\text{ V}$ | | 60 | | mA |
| I_{CC} | Supply current / operator | $A_{VCL} = 1$, no load, $T_{min} \leq T_{amb} \leq T_{max}$ | | 400 | 600 700 | μA |
| GBP | Gain bandwidth product | $A_{VCL} = 100$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$, $f = 100\text{ kHz}$ | | 1.4 | | MHz |
| SR | Slew rate | $A_{VCL} = 1$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$, $V_i = 2.5\text{ V to }7.5\text{ V}$ | | 1 | | V/ μs |
| ϕ_m | Phase margin | $R_s = 100\ \Omega$, $f = 1\text{ kHz}$ | | 40 | | $^\circ$ |
| e_n | Equivalent input noise voltage | $R_s = 100\ \Omega$, $f = 1\text{ kHz}$ | | 30 | | nV/ $\sqrt{\text{Hz}}$ |
| THD | Total harmonic distortion | $A_{VCL} = 1$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$, $V_o = 4.75\text{ to }5.25\text{ V}$, $f = 1\text{ kHz}$ | | 0.02 | | % |
| C_{in} | Input capacitance | | | 1.5 | | pF |

Table 5. $V_{CC^+} = 10\text{ V}$, $V_{DD} = 0\text{ V}$, R_L, C_L connected to $V_{CC}/2$, $T_{amb} = 25\text{ }^\circ\text{C}$
(unless otherwise specified) (continued)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------|--------------------|--------------------|------|------|------|---------------|
| R_{in} | Input resistance | | | >10 | | Tera Ω |
| V_{O1}/V_{O2} | Channel separation | $f = 1\text{ kHz}$ | | 120 | | dB |

1. Maximum values include unavoidable inaccuracies of the industrial tests.

Figure 2. Supply current (each amplifier) vs. supply voltage

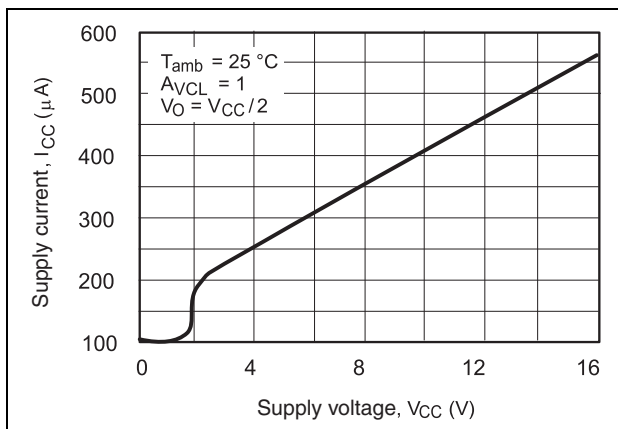


Figure 3. High level output voltage vs. high level output current (VCC = +5 V, VCC = +3 V)

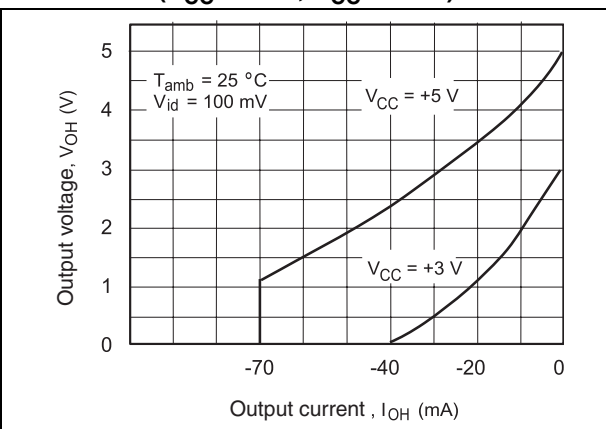


Figure 4. Low level output voltage vs. low level output current (VCC = +5 V, VCC = +3 V)

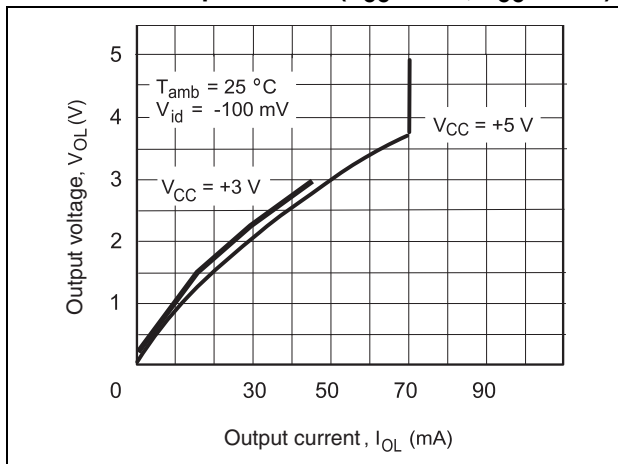


Figure 5. Input bias current vs. temperature

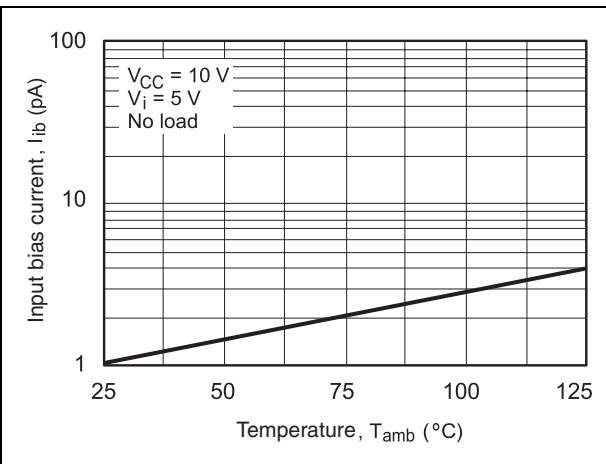


Figure 6. High level output voltage vs. high level output current (VCC = +16 V, VCC = +10 V)

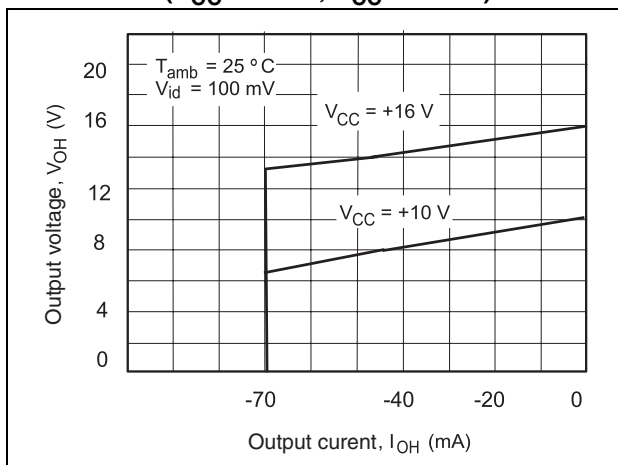


Figure 7. Low level output voltage vs. low level output current (VCC = 16 V, VCC = 10 V)

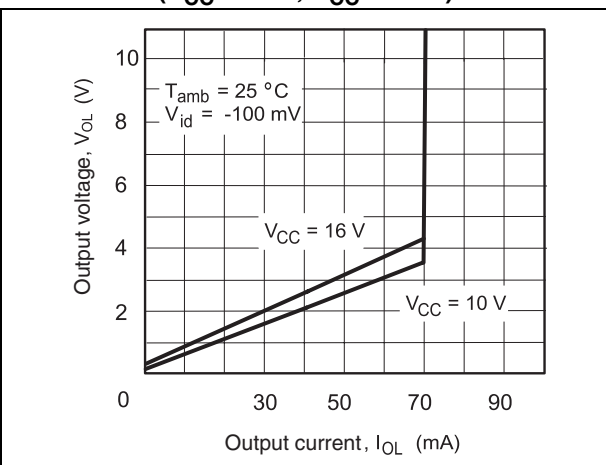


Figure 8. Gain and phase vs. frequency
($R_L = 10\text{ k}\Omega$)

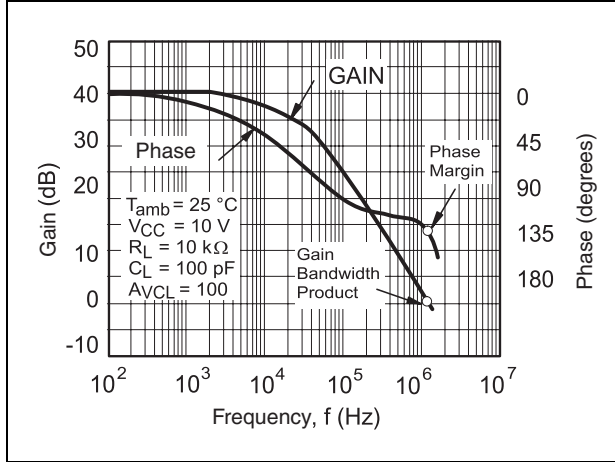


Figure 9. Gain bandwidth product vs. supply voltage
($R_L = 10\text{ k}\Omega$)

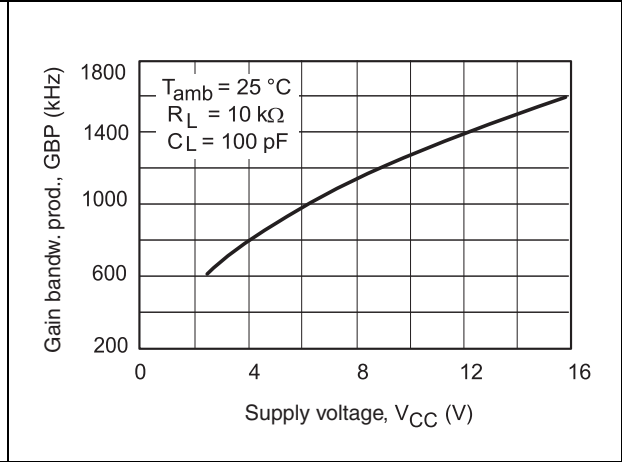


Figure 10. Phase margin vs. supply voltage
($R_L = 10\text{ k}\Omega$)

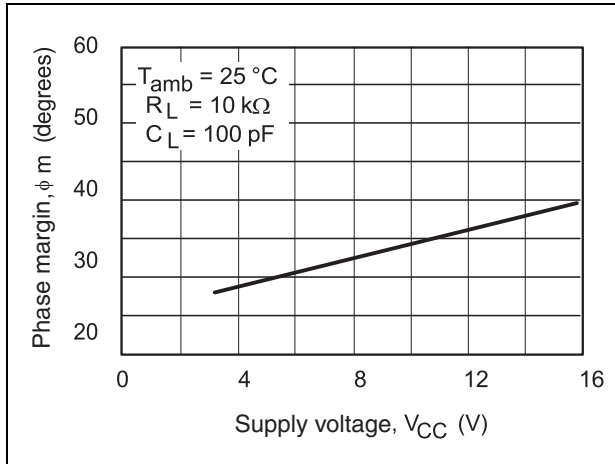


Figure 11. Gain and phase vs. frequency
($R_L = 600\ \Omega$)

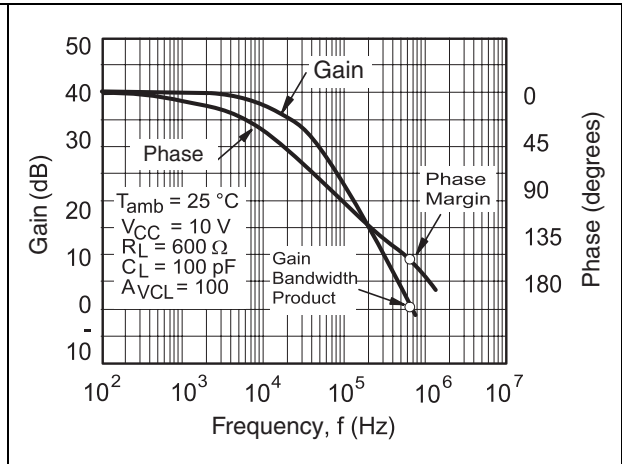


Figure 12. Gain bandwidth product vs. supply voltage
($R_L = 600\ \Omega$)

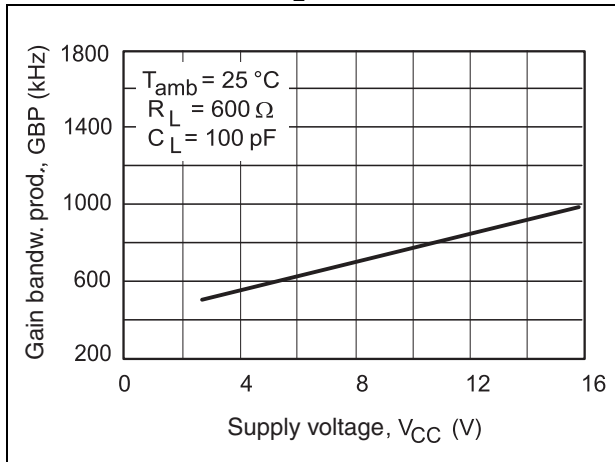


Figure 13. Phase margin vs. supply voltage
($R_L = 600\ \Omega$)


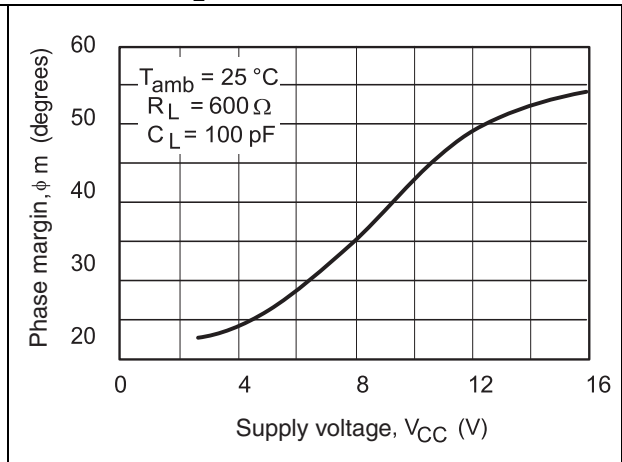


Figure 14. Input voltage noise vs. frequency

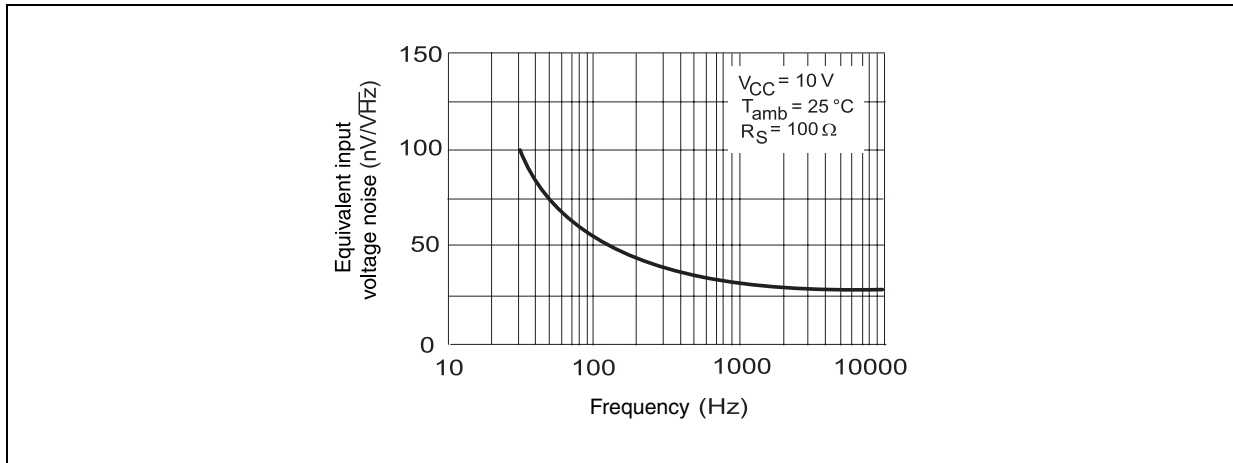

4 Macromodels

4.1 Important note concerning this macromodel

- All models are a trade-off between accuracy and complexity (that is, simulation time). Macromodels are not a substitute for breadboarding; rather, they confirm the validity of a design approach and help to select surrounding component values.
- A macromodel emulates the nominal performance of a typical device within specified operating conditions (such as temperature or supply voltage, etc.). Thus, the macromodel is often not as exhaustive as the datasheet, its purpose is to illustrate the main parameters of the product.
- Data derived from macromodels used outside of the specified conditions (such as V_{CC} , or temperature) or even worse, outside of the device's operating conditions (such as V_{CC} or V_{icm}) is not reliable in any way.

The values provided in [Table 6](#) are derived from this macromodel.

Table 6. $V_{CC}^+ = 3\text{ V}$, $V_{CC}^- = 0\text{ V}$, R_L , C_L connected to $V_{CC/2}$, $T_{amb} = 25\text{ °C}$
(unless otherwise specified)

| Symbol | Conditions | Value | Unit |
|--------------|---|-------------|------------------|
| V_{io} | | 0 | mV |
| A_{vd} | $R_L = 10\text{ k}\Omega$ | 10 | V/mV |
| I_{CC} | No load, per operator | 100 | μA |
| V_{icm} | | -0.2 to 3.2 | V |
| V_{OH} | $R_L = 600\ \Omega$ | 2.96 | V |
| V_{OL} | $R_L = 60\ \Omega$ | 300 | mV |
| I_{sink} | $V_O = 3\text{ V}$ | 40 | mA |
| I_{source} | $V_O = 0\text{ V}$ | 40 | mA |
| GBP | $R_L = 10\text{ k}\Omega$ $C_L = 100\text{ pF}$ | 0.8 | MHz |
| SR | $R_L = 10\text{ k}\Omega$ $C_L = 100\text{ pF}$ | 0.3 | V/ μs |
| ϕ_m | Phase margin | 30 | Degrees |

4.2 Macromodel code

```

* Standard Linear Ics Macromodels, 1993.
** CONNECTIONS :
* 1 INVERTING INPUT
* 2 NON-INVERTING INPUT
* 3 OUTPUT
* 4 POSITIVE POWER SUPPLY
* 5 NEGATIVE POWER SUPPLY
*
.SUBCKT TS914 1 2 3 4 5
*****
.MODEL MDTH D IS=1E-8 KF=6.564344E-14 CJO=10F
CIP 2 5 1.000000E-12
CIN 1 5 1.000000E-12
EIP 10 5 2 5 1
EIN 16 5 1 5 1
RIP 10 11 6.500000E+00
RIN 15 16 6.500000E+00
RIS 11 15 7.322092E+00
DIP 11 12 MDTH 400E-12
DIN 15 14 MDTH 400E-12
VOFP 12 13 DC 0.000000E+00
VOFN 13 14 DC 0
IPOL 13 5 4.000000E-05
CPS 11 15 2.498970E-08
DINN 17 13 MDTH 400E-12
VIN 17 5 0.000000E+00
DINR 15 18 MDTH 400E-12
VIP 4 18 0.000000E+00
FCP 4 5 VAFP 5.750000E+00
FCN 5 4 VAFN 5.750000E+00
* AMPLIFYING STAGE
FIP 5 19 VAFP 4.400000E+02
FIN 5 19 VAFN 4.400000E+02
RG1 19 5 4.904961E+05
RG2 19 4 4.904961E+05
CC 19 29 2.200000E-08
HZTP 30 29 VAFP 1.8E+03
HZTN 5 30 VAFN 1.8E+03
DOPM 19 22 MDTH 400E-12
DONM 21 19 MDTH 400E-12
HOPM 22 28 VOUT 3800
VIPM 28 4 230
HONM 21 27 VOUT 3800
VINM 5 27 230
EOUT 26 23 19 5 1
VOUT 23 5 0
ROUT 26 3 82
COUT 3 5 1.000000E-12
DOP 19 68 MDTH 400E-12
VOP 4 25 1.724

```

```
HSCP 68 25 VSCP1 0.8E+8
DON 69 19 MDTH 400E-12
VON 24 5 1.7419107
HSCN 24 69 VSCN1 0.8E+8
VSCTHP 60 61 0.0875
DSCP1 61 63 MDTH 400E-12
VSCP1 63 64 0
ISCP 64 0 1.000000E-8
DSCP2 0 64 MDTH 400E-12
DSCN2 0 74 MDTH 400E-12
ISCN 74 0 1.000000E-8
VSCN1 73 74 0
DSCN1 71 73 MDTH 400E-12
VSCTHN 71 70 -0.55
ESCP 60 0 2 1 500
ESCN 70 0 2 1 -2000
.ENDS
```

5 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

Figure 15. SO-14 package outline

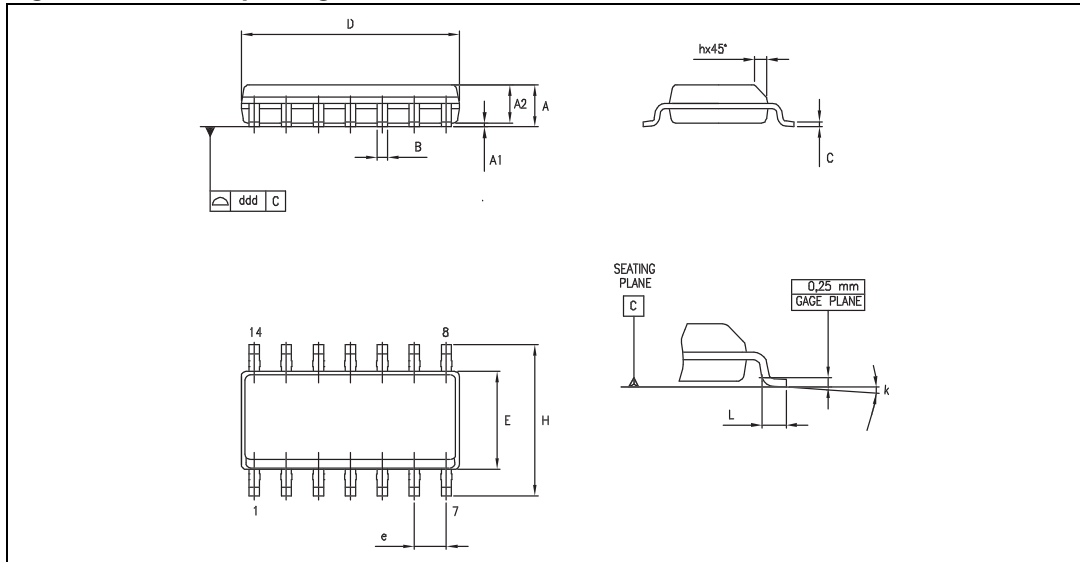


Table 7. SO-14 package mechanical data

| Dimensions | | | | | | |
|------------|-------------|------|------|--------|------|-------|
| Symbol | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 1.35 | | 1.75 | 0.05 | | 0.068 |
| A1 | 0.10 | | 0.25 | 0.004 | | 0.009 |
| A2 | 1.10 | | 1.65 | 0.04 | | 0.06 |
| B | 0.33 | | 0.51 | 0.01 | | 0.02 |
| C | 0.19 | | 0.25 | 0.007 | | 0.009 |
| D | 8.55 | | 8.75 | 0.33 | | 0.34 |
| E | 3.80 | | 4.0 | 0.15 | | 0.15 |
| e | | 1.27 | | | 0.05 | |
| H | 5.80 | | 6.20 | 0.22 | | 0.24 |
| h | 0.25 | | 0.50 | 0.009 | | 0.02 |
| L | 0.40 | | 1.27 | 0.015 | | 0.05 |
| k | 8° (max.) | | | | | |
| ddd | | | 0.10 | | | 0.004 |

6 Ordering information

Table 8. Order codes

| Order code | Temperature range | Package | Packing | Marking |
|---------------------------|-------------------|-----------------------------------|------------------------|---------|
| TS914ID TS914IDT | -40, +125 °C | SO-14 | Tube and tape and reel | 914I |
| TS914AID TS914AIDT | | SO-14 | Tube and tape and reel | 914AI |
| TS914IYDT ⁽¹⁾ | | SO-14 (automotive grade level) | Tube and tape and reel | 914IY |
| TS914AIYDT ⁽¹⁾ | | SO-14 (automotive grade level) | Tape and reel | 914AIY |

1. Qualified and characterized according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q 002 or equivalent.

7 Revision history

Table 9. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 01-Dec-2001 | 1 | Initial release. |
| 01-Nov-2004 | 2 | Changed V_{io} max. on cover page from 2 mV to 5 mV. |
| 01-Jun-2005 | 3 | Inserted PIPAP references (see order code table on cover page). |
| 01-Feb-2006 | 4 | Added parameters in Table 1: Absolute maximum ratings on page 2 (T_j , ESD, R_{thja} , R_{thjc}). |
| 08-Jan-2007 | 5 | Corrected package names in order codes table on cover page. Corrected macromodel. |
| 02-Apr-2009 | 6 | Minor text edits. Removed table of contents. Updated package information in Chapter 5 . Moved Table 8: Order codes from cover page to end of datasheet. Added footnote to Table 8: Order codes . |
| 04-Feb-2010 | 7 | Added parameters for TS914A. Removed DIP14 package information. Removed TS914AIYD order code from Table 8 . |
| 06-Nov-2012 | 8 | Updated Features (added Related products). Updated titles of Figure 3 , Figure 4 , Figure 6 to Figure 13 (added conditions to differentiate them). Removed TS914IYD device from Table 8 . Minor corrections throughout document. |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[TS914AID](#) [TS914ID](#) [TS914AIDT](#) [TS914IDT](#) [TS914IYDT](#) [TS914AIYDT](#)