

SPECIFICATION FOR APPROVAL

REF : 20091229-B

PAGE: 1

PROD. NAME	WIDE BAND CHOKE	ABC'S DWG NO. ABC'S ITEM NO.	WB0610□□□□L□-□□□
---------------	-----------------	---------------------------------	------------------

I . CONFIGURATION & DIMENSIONS :




Fig : A




Fig : D




Fig : B




Fig : E






Fig : C



V . IMPEDANCE CURVE :

Test Instrument : RF Impedance Analyzer HP4291A
Test Fixture : Spring Clipfixture HP16093A

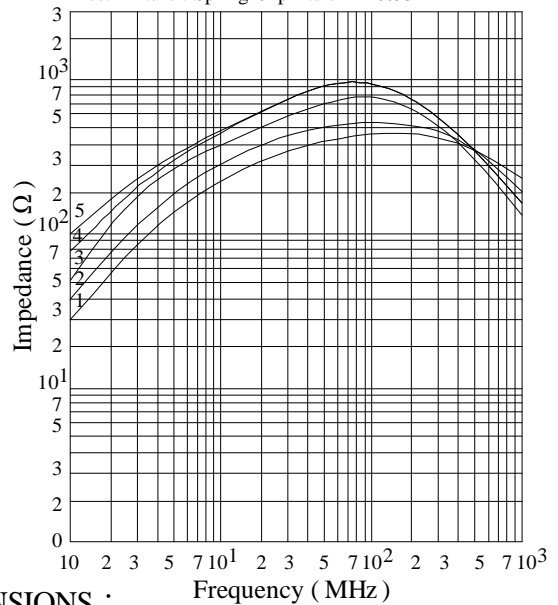

II . MATERIALS :

- a . Core : Ferrite R6H core
- b . Wire : Tinned copper wire
- c . Remark : Products comply with RoHS' requirements

III . GENERAL SPECIFICATION :

- a . Storage temp. : -40°C --- +105°C
- b . Operating temp. : -40°C --- +105°C

IV . ELECTRICAL CHARACTERISTICS & DIMENSIONS :

DWG No.	Z (Ω) min.	Test Freq. (MHz)	Dimension (m/m).					Number of. Turn	Fig.
			A±0.5	B±0.5	C +0	D±5	Wφ ±0.05		
WB0610301YL□-□□□	300	120	6.0	10	14	40	0.57φ	1.5	A
WB0610451YL□-□□□	450	90	6.0	10	14	20	0.57φ	2.0	D
WB0610601YL□-□□□	600	50	6.0	10	14	40	0.57φ	2.5	B
WB0610721YL□-□□□	720	80	6.0	10	14	20	0.57φ	3.0	E
WB0610701YL□-□□□	700	50	6.0	10	14	40	0.57φ	1.5+1.5	C

- 1). □ : Packging information... [A]: Bule
- 3). Test equipment : RF impedance analyzer HP4291A
- 2). "- □□□□ ":Reference code
- 4). Test fixture : Spring clip fixture HP16093A

AR-001A




SPECIFICATION FOR APPROVAL

REF : 20091229-B

PAGE: 2

PROD. NAME	WIDE BAND CHOKE	ABC'S DWG NO.	WB0610□□□□L□-□□□
		ABC'S ITEM NO.	

VI . DWGING NUMBER EXPRESSION :

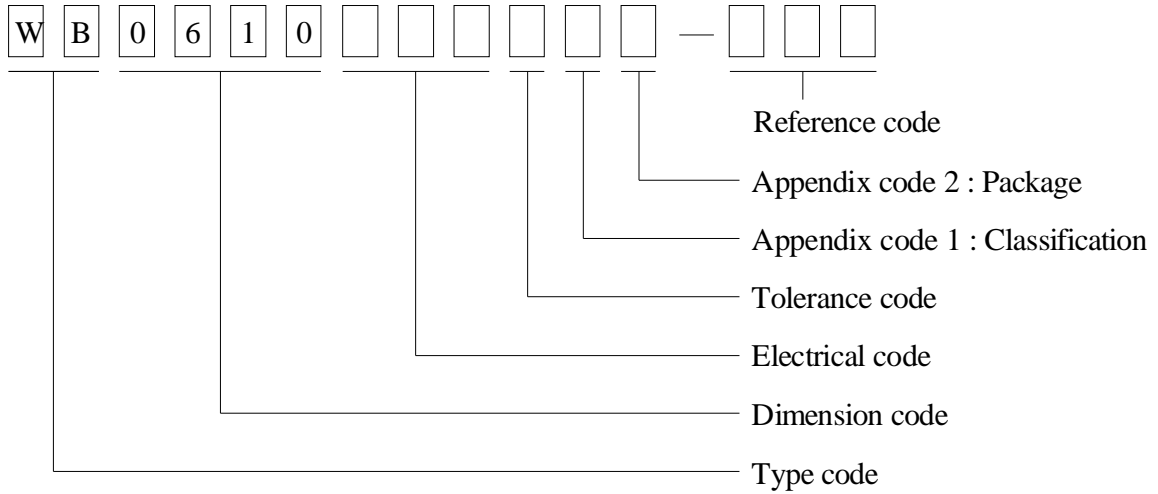

Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package QTY	Remark
A	Box	300 pcs	
B	Box	300 pcs	