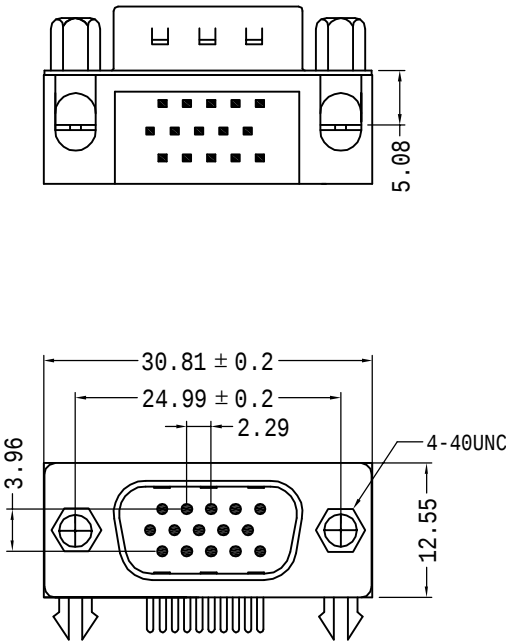


Specifications:
Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 3AMP

Dielectric Withstanding
Voltage: AC 1000V For 1 minute
Operating Temperature: -55℃--+105℃
Contact: Brass
Housing: PBT &30% Glass Fiber(UL 94V-0)

- 要求:
- 1. 塑料件无裂痕。
 - 2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
		图名/Title	文件编号/File No.	X. ±0.2	X." ±2"
		108-15P		.X ±0.1	.X" ±1"
		备注/Remark	页序/Sheet	.XX ±0.05	.XX" ±0.5"
				.XXX ±0.01	
				单位/Units: mm	