

PCB Layout

Proper Cable


Material
Housing: LCP UL94V-0
Lock: PA46, UL94V-0
Plug spring: Phosphor Bronze, Gold/Tin

Electrical
Voltage rating: 50 V
Current Rating: 0.5 A
Withstanding Voltage: 500 V
Insulation resistance: 800MΩ.Min.
Contact resistance: 20 mΩ.Max.

Mechanical
Temp. Range: -25 °C ~ +85 °C

Order Information

L-KLS1- 1240E - 5.4- XX -T-R

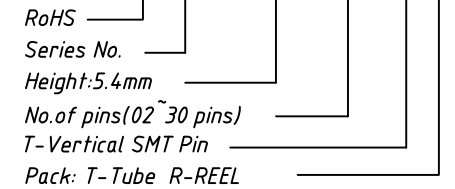

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.15	X. ±5°	UNITS	CONN FFC 1.00mm, SMD, Vertical, with ZIF
.X ±0.03	.X ±3°	SHEET SIZE	
.XX ±0.05	.XX ±2°	KLS P/N:	

Draw by: Date	2018-03-10
Check by: Date	2018-03-10
SCALE	SHEET OF

KLS
NingBo KLS ELECTRONIC CO.,LTD.