

## Modular Jacks

KLS12-140-8P8C RJ 45 Right-Angle Modular Jack , Shield Side Entry, Gold

### ELECTRICAL




1. Current Rating: 1.5 Amp
2. Voltage Rating: 125VAC
3. Contact Resistance: 30 MΩ Max.
4. Insulation Resistance: 500 MΩ Min. @500VDC
5. Withstanding Voltage: AC1000V 50Hz or 60Hz 1min.

### MECHANICAL



1. Durability :600 cycles Min.
2. PCB Retention pre-solder : 1 LB MIN

### ENVIRONMENTAL

1. Storage : -40°C~+80°C
2. Operation: -40°C~+70°C

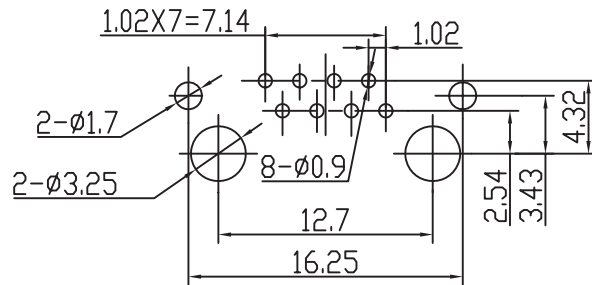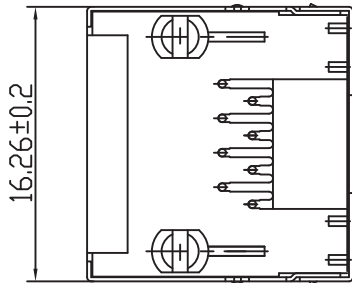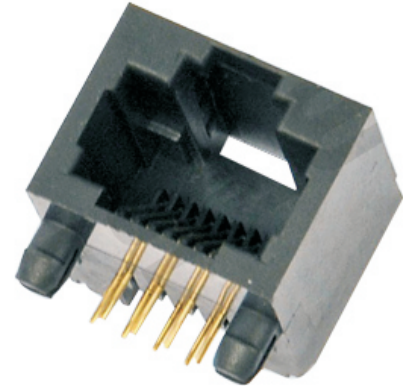

PC Board Layout

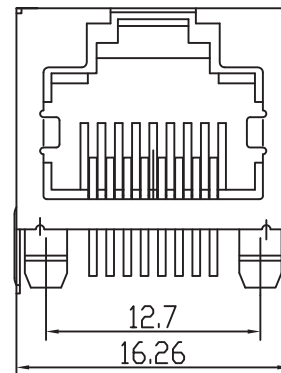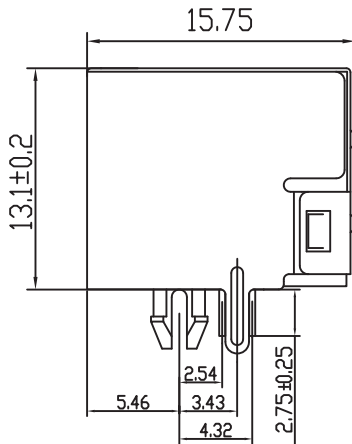

## ORDER INFORMATION

**KLS12-140-8P8C-W-01**

Pos.NO.  
Right-Angle Modular Jack  
W=With Shield

Gold Thickness
01-Fu"
02-3u"
03-6u"
04-15u"
05-30u"
06-50u"