

SR22 THRU SR220

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE: 20 to 200 VOLTS

FORWARD CURRENT: 2.0 AMPERE



FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- High current capacity
- Built-in strain relief
- Low profile package
- Metal to silicon rectifier, majority carrier conduction
- High surge capacity
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering : 250°C /10 seconds at terminals

MECHANICAL DATA


Case: Molded plastic, DO-214AC(SMA)

Terminals: Axial leads, solderable per MIL-STD-750, method 2026 guaranteed

Polarity: Color band denotes cathode end

Packaging: 12mm tape per EIA STD RS-481

Weight: 0.002 ounce, 0.064 gram

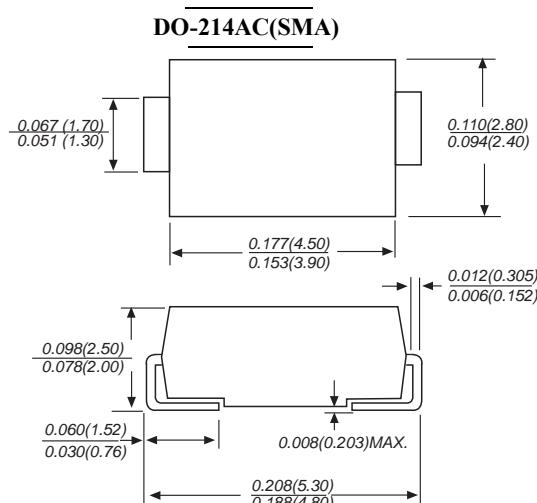

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SR22	SR23	SR24	SR25	SR26	SR28	SR29	SR210	SR215	SR220	Units						
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	90	100	150	200	Volts						
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	64	71	106	141	Volts						
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	90	100	150	200	Volts						
Maximum Average Forward Rectified Current at T_L (See Fig. 1)	I _(AV)	2.0									Amp							
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	50									Amp							
Maximum Forward Voltage at 2.0A (Note 1)	V _F	0.50		0.70		0.85		0.95		Volts								
Maximum Reverse Current at T_A=25°C at Rated DC Blocking Voltage T_A=100°C	I _R	0.5 20									mAmp							
Typical Thermal Resistance (Note 2)	R _{0JA} R _{0JL}	75 17									°C/W							
Operating Junction Temperature Range	T _J	-55 to +125									°C							
Storage Temperature Range	T _{Stg}	-55 to +150									°C							

NOTES:

1- Pulse test: 300μs pulse width, 1% duty cycle

2- P.C.B. mounted with 0.3 x 0.3" (8.0 x 8.0mm) Copper Pad Areas

SR22 THRU SR220

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



康比電子
HORNBY ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES

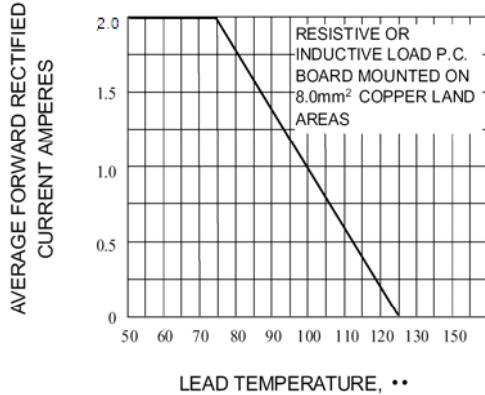


Fig. 1-FORWARD CURRENT DERATING CURVE

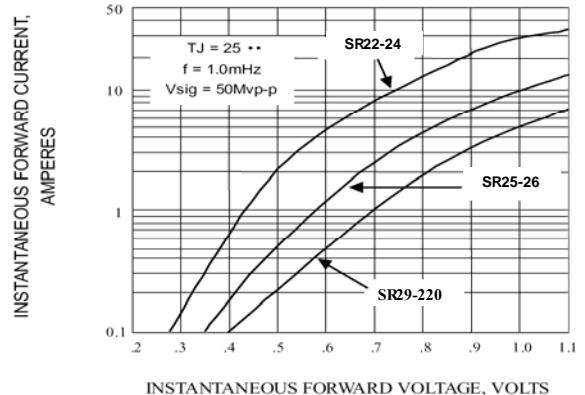


Fig. 2-TYPICAL INSTANTANEOUS FORWARD
CHARACTERISTICS

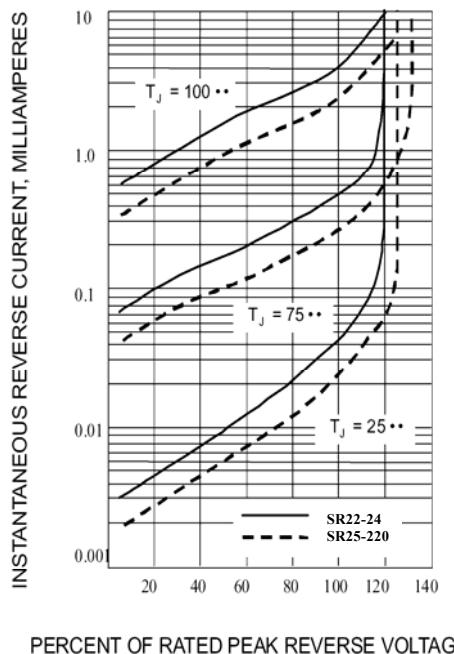


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

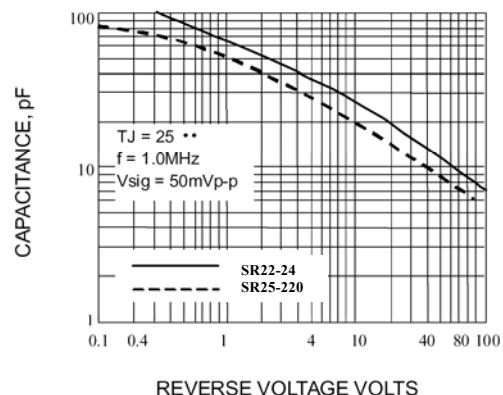


Fig. 4-TYPICAL JUNCTION CAPACITANCE

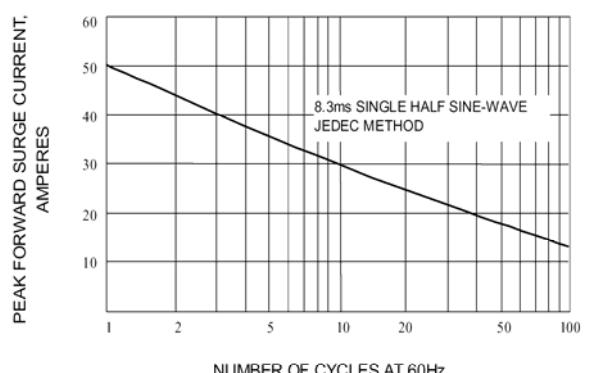


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD
SURGE CURRENT