

SK12 THRU SK120

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



REVERSE VOLTAGE: 20 to 200 VOLTS

FORWARD CURRENT: 1.0 AMPERE

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- High current capacity
- Built-in strain relief
- Low profile package
- Metal to silicon rectifier, majority carrier conduction
- High surge capacity
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering : 250°C /10 seconds at terminals

DO-214AA(SMB)

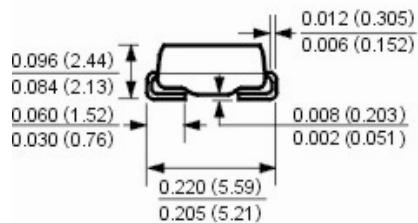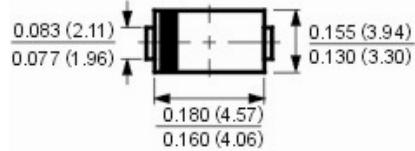

MECHANICAL DATA

Case: Molded plastic, DO-214AA(SMB)

Terminals: Solder plated, solderable per MIL-STD-750, method 2026 guaranteed

Polarity: Color band denotes cathode end

Packaging: 12mm tape per EIA STD RS-481

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| | Symbols | SK12 | SK13 | SK14 | SK15 | SK16 | SK18 | SK19 | SK10 | SK115 | SK120 | Units | | | | | | |
|--|--------------------------------------|-------------|------|------|------|------|------|------|------|-------|-------|-------|--|--|--|--|--|--|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 20 | 30 | 40 | 50 | 60 | 80 | 90 | 100 | 150 | 200 | Volts | | | | | | |
| Maximum RMS Voltage | V _{RMS} | 14 | 21 | 28 | 35 | 42 | 56 | 63 | 70 | 105 | 140 | Volts | | | | | | |
| Maximum DC Blocking Voltage | V _{DC} | 20 | 30 | 40 | 50 | 60 | 80 | 90 | 100 | 150 | 200 | Volts | | | | | | |
| Maximum Average Forward Rectified Current at T _L (See Fig. 1) | I _(AV) | 1.0 | | | | | | | | | Amp | | | | | | | |
| Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method) | I _{FSM} | 30 | | | | | | | | | Amp | | | | | | | |
| Maximum Forward Voltage at 1.0A (Note 1) | V _F | 0.55 | | 0.70 | | 0.85 | | 0.95 | | Volts | | | | | | | | |
| Maximum Reverse Current at T _A =25°C at Rated DC Blocking Voltage T _A =100°C | I _R | 0.5 20 | | | | | | | | | mAmp | | | | | | | |
| Typical Thermal Resistance (Note 2) | R _{θJA} R _{θJL} | 88 28 | | | | | | | | | °C/W | | | | | | | |
| Operating Junction Temperature Range | T _J | -55 to +125 | | | | | | | | | °C | | | | | | | |
| Storage Temperature Range | T _{stg} | -55 to +150 | | | | | | | | | °C | | | | | | | |

NOTES:

1- Pulse test: 300μs pulse width, 1% duty cycle

2- P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) Copper Pad Areas

SK12 THRU SK120

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



康比電子
HORNBY ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES

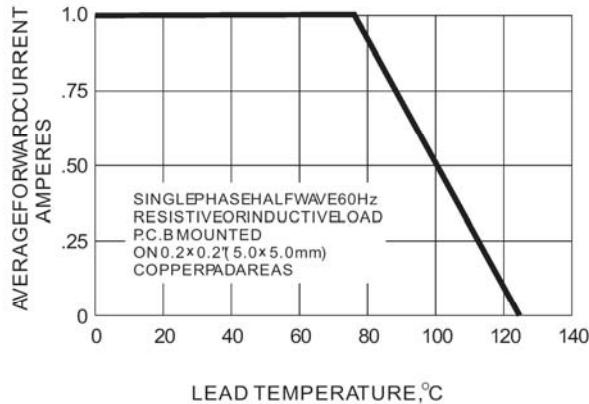


Fig.1-FORWARD CURRENT DERATING CURVE

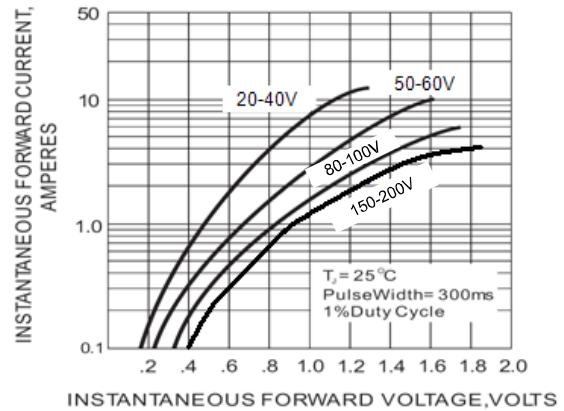


Fig.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

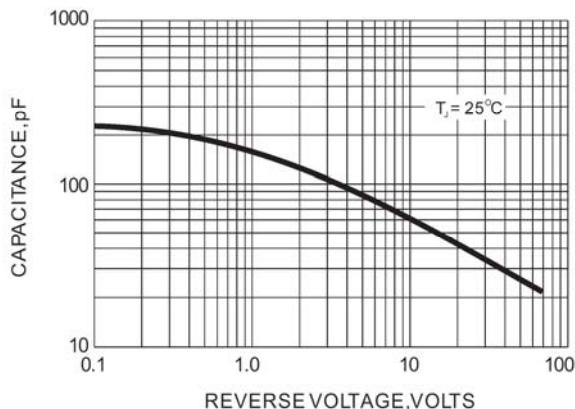


Fig.3-TYPICAL JUNCTION CAPACITANCE

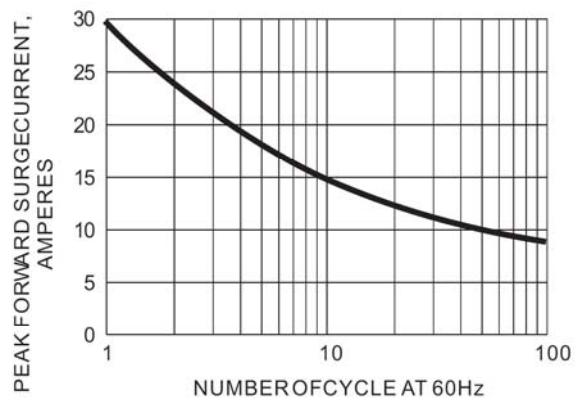


Fig.4-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT