

Trimmer Potentiometer

KLS4-WI0303 Series

FEATURES

This specification applies to the variable resistors for electronic equipment Polyester substrate.



- *Long life model for low cost control pot applications
- *Since a variety of types are available, they can be used for a wide range of products
- *Special tapers
- *Low torque option

MECHANICAL SPECIFICATIONS

Rotation angle: 360° Continuous
Electrically effective angle: 220°±20°
Rotation torque :2-35mN. M

ELECTRICAL SPECIFICATIONS

Range of nominal resistance: 500Ω-1MΩ
Resistance taper: B
Resistance tolerance: ± 30%
Rotational noise: 5% R
Residual resistance: R <1Kohm, Max 20ohm, R ≥1Kohm, Max 2% R
Rated power: 0.1 W
Max. Operating voltage: DC50V
Mechanical endurance: 20 cycles
Operating temperature: -25°C~+70°C

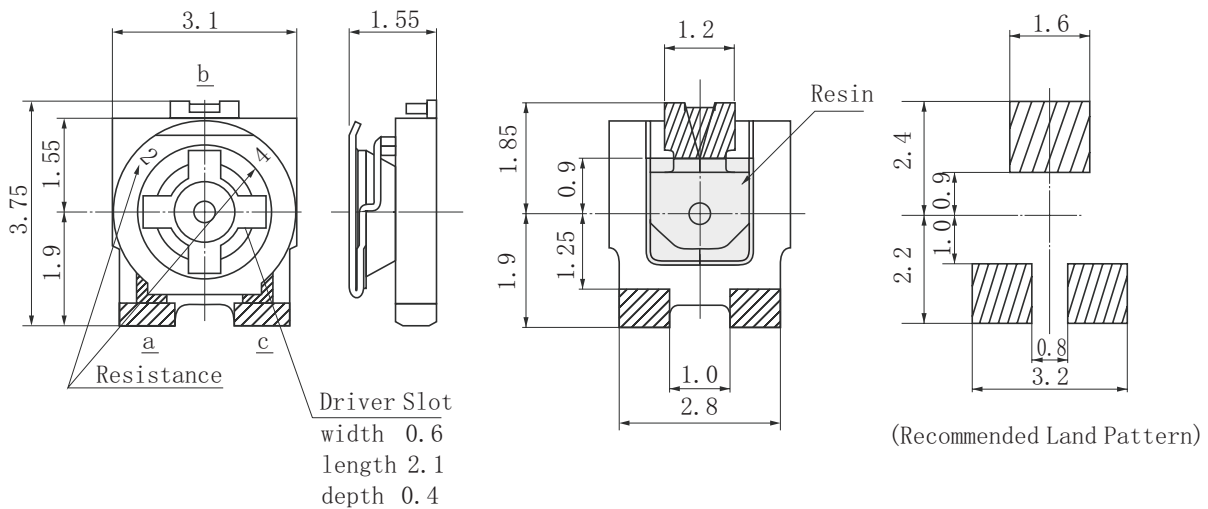

(Circuit diagram)

ORDER INFORMATION

Product No.: KLS4- WI0303 -103

Pos. No. _____
3mm Trimmer potentiometer Series _____ Value: 103- 10000Ω