


WEH001601A OLED Character 16x1

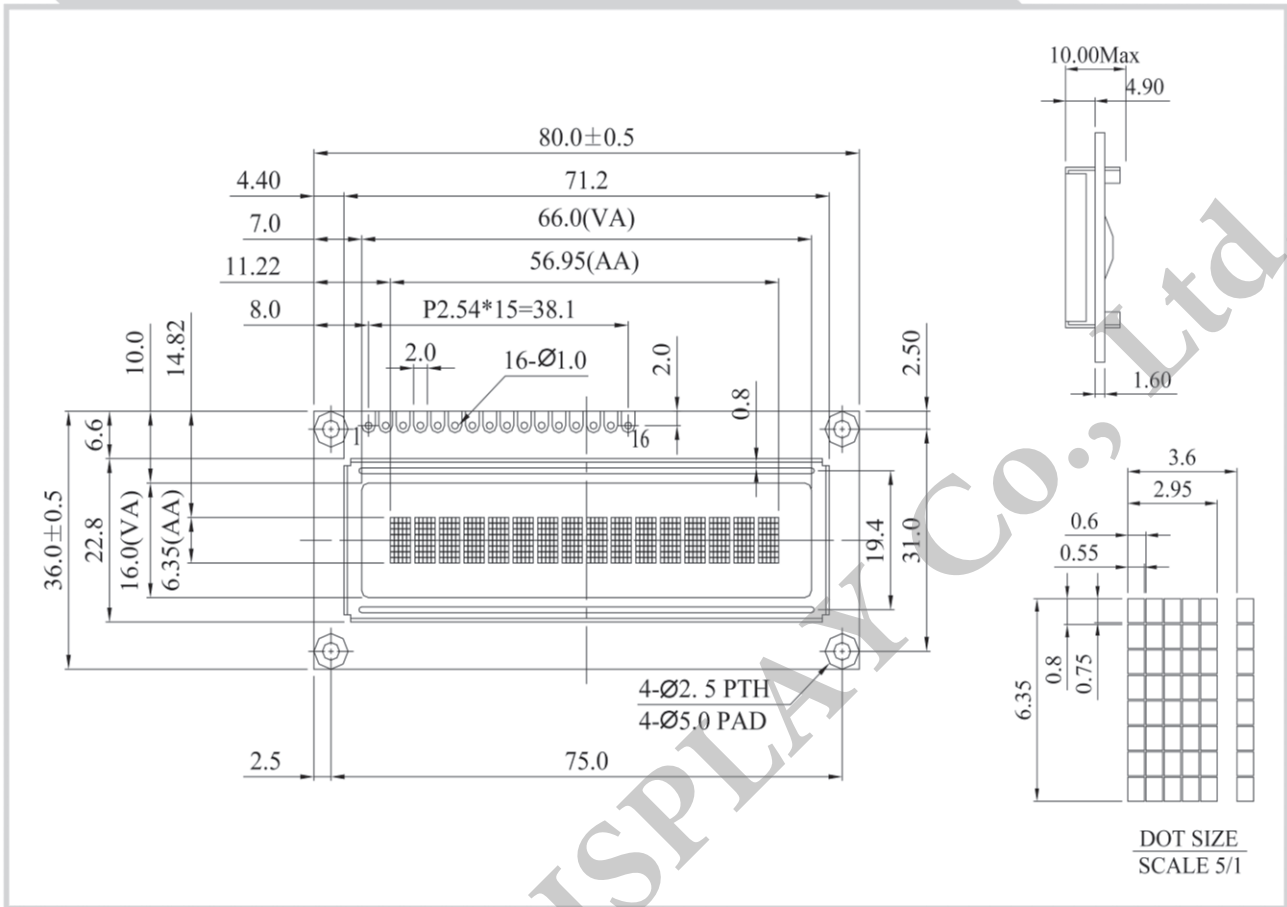

Feature

- 16 characters x 1 Lines
- Built-in Controller WS0010
- 5V power supply
- 1/8 duty cycle
- Interface: 6800, option 8080, SPI
- Polarizer optional

| Pin No. | Symbol | Description |
|---------|--------|--------------------|
| 1 | VSS | Ground Pin |
| 2 | VDD | Voltage for logic |
| 3 | NC | No Connection |
| 4 | RS | Register Select |
| 5 | R/W | Read/Write Control |
| 6 | E | Chip Enable Signal |
| 7 | DB0 | Data Bus |
| 8 | DB1 | Data Bus |
| 9 | DB2 | Data Bus |
| 10 | DB3 | Data Bus |
| 11 | DB4 | Data Bus |
| 12 | DB5 | Data Bus |
| 13 | DB6 | Data Bus |
| 14 | DB7 | Data Bus |
| 15 | NC | No Connection |
| 16 | NC | No Connection |

Mechanical Data

| Item | Standard Value | Unit |
|------------------|----------------|------|
| Module Dimension | 80.0 x 36.0 | mm |
| Viewing Area | 66.0 x 16.0 | mm |
| Active Area | 56.95 x 6.35 | mm |
| Dot Pitch | 0.60 x 0.80 | mm |
| Dot Size | 0.55 x 0.75 | mm |

Electrical Characteristics

| Item | Symbol | Condition | Standard Value | | | Unit |
|---------------|--------|-----------|----------------|------|------|------|
| | | | min. | typ. | max. | |
| Input Voltage | VDD | --- | 4.8 | 5.0 | 5.3 | V |