

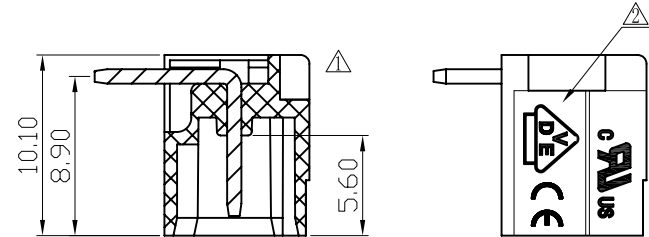
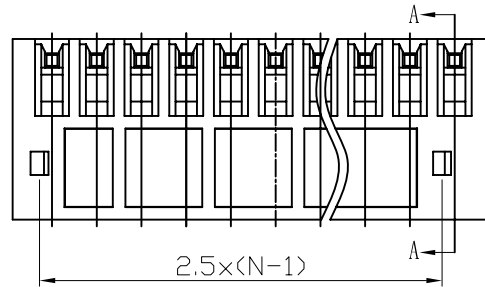




| REVISION RECORD |         |                 |            |           |
|-----------------|---------|-----------------|------------|-----------|
| REV             | ECN     | DESCRIPTION     | DRFT       | DATE      |
| △               | 10-0286 | 修改外观            | Jinbai.Lan | 08/31/10* |
| △               | 10-0357 | 增加VDE、CE刻字及修改参数 | ZXX        | 10/21/10* |

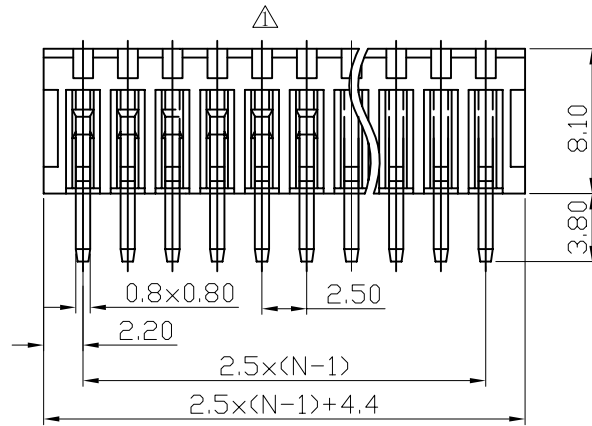

SECTION A-A



\*02P

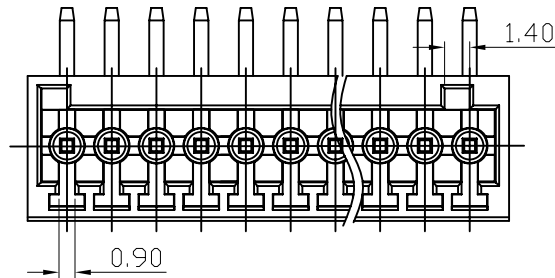

Notes:

1. Pitch: 2.5, Poles: 2-12P
2. Rated voltage/Current: UL 150V/4A  
VDE 250V/5A △
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC1500V/1min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Undimensioned Tolerances:

| Pitch range in mm |        | Nominal dimension range in mm |         |         |          |          |          |  |
|-------------------|--------|-------------------------------|---------|---------|----------|----------|----------|--|
|                   | over 6 | over 10                       | over 30 | over 60 | over 100 | over 150 | —        |  |
| to                | to 10  | to 24                         | to 30   | to 60   | to 100   | to 150   | ○        |  |
| to 6              |        |                               |         |         |          |          | □        |  |
|                   | ±0.10  | ±0.15                         | ±0.25   | ±0.2    | ±0.3     | ±0.5     | ±0.7     |  |
|                   |        |                               |         |         |          |          | ±1.0     |  |
|                   |        |                               |         |         |          |          | 0.005/10 |  |

| 2              | 15EDGRC header             | 1218B00010 (H)       | XX             | Brass   | SnCe             |
|----------------|----------------------------|----------------------|----------------|---|------------------|
| 1              | 15EDGV/RC Housing          | 1218A0YXXA (H)       | 1              | PA66  | UL94V-0          |
| ITEM           | NAME OF PART               | NO. OF PART          | Q"TY           | MATERIAL  | NOTES            |
| DETACHED LISTS | MM (INCH)                  | DFTO LIN             | DATE 10/20/08* | 宁波高正电子有限公司<br>DEGSON ELECTRONICS CO., LTD<br>NAME<br>15EDGRC-2.5-XXP-1Y-00A (H) |                  |
|                | TOLERANCES EXCEPT AS NOTED | CHKD                 | DATE           |   |                  |
|                | MM                         | MFD                  | DATE           |   |                  |
|                | .0 ±                       | APPVL                | DATE           |   |                  |
|                |                            |                      |                | MATERIAL :  |                  |
|                | ANGLES ± 1°                | G.E :                |                |   |                  |
|                | THIRD ANGLE PROJECTION     | FINISH:              |                |   |                  |
|                |                            | SCALE : 1:1          |                |   |                  |
|                |                            | DO NOT SCALE DRAWING |                | SHEET 1   | OF 1             |
|                |                            |                      |                | SIZE A4   | REV T2 10/21/10* |